


PRODUCT DATA DRAWING

CAD
GENERATED
DRAWING

DCN
CONTROLLED
DOCUMENT

DWG. NO.
M55339/30-30003

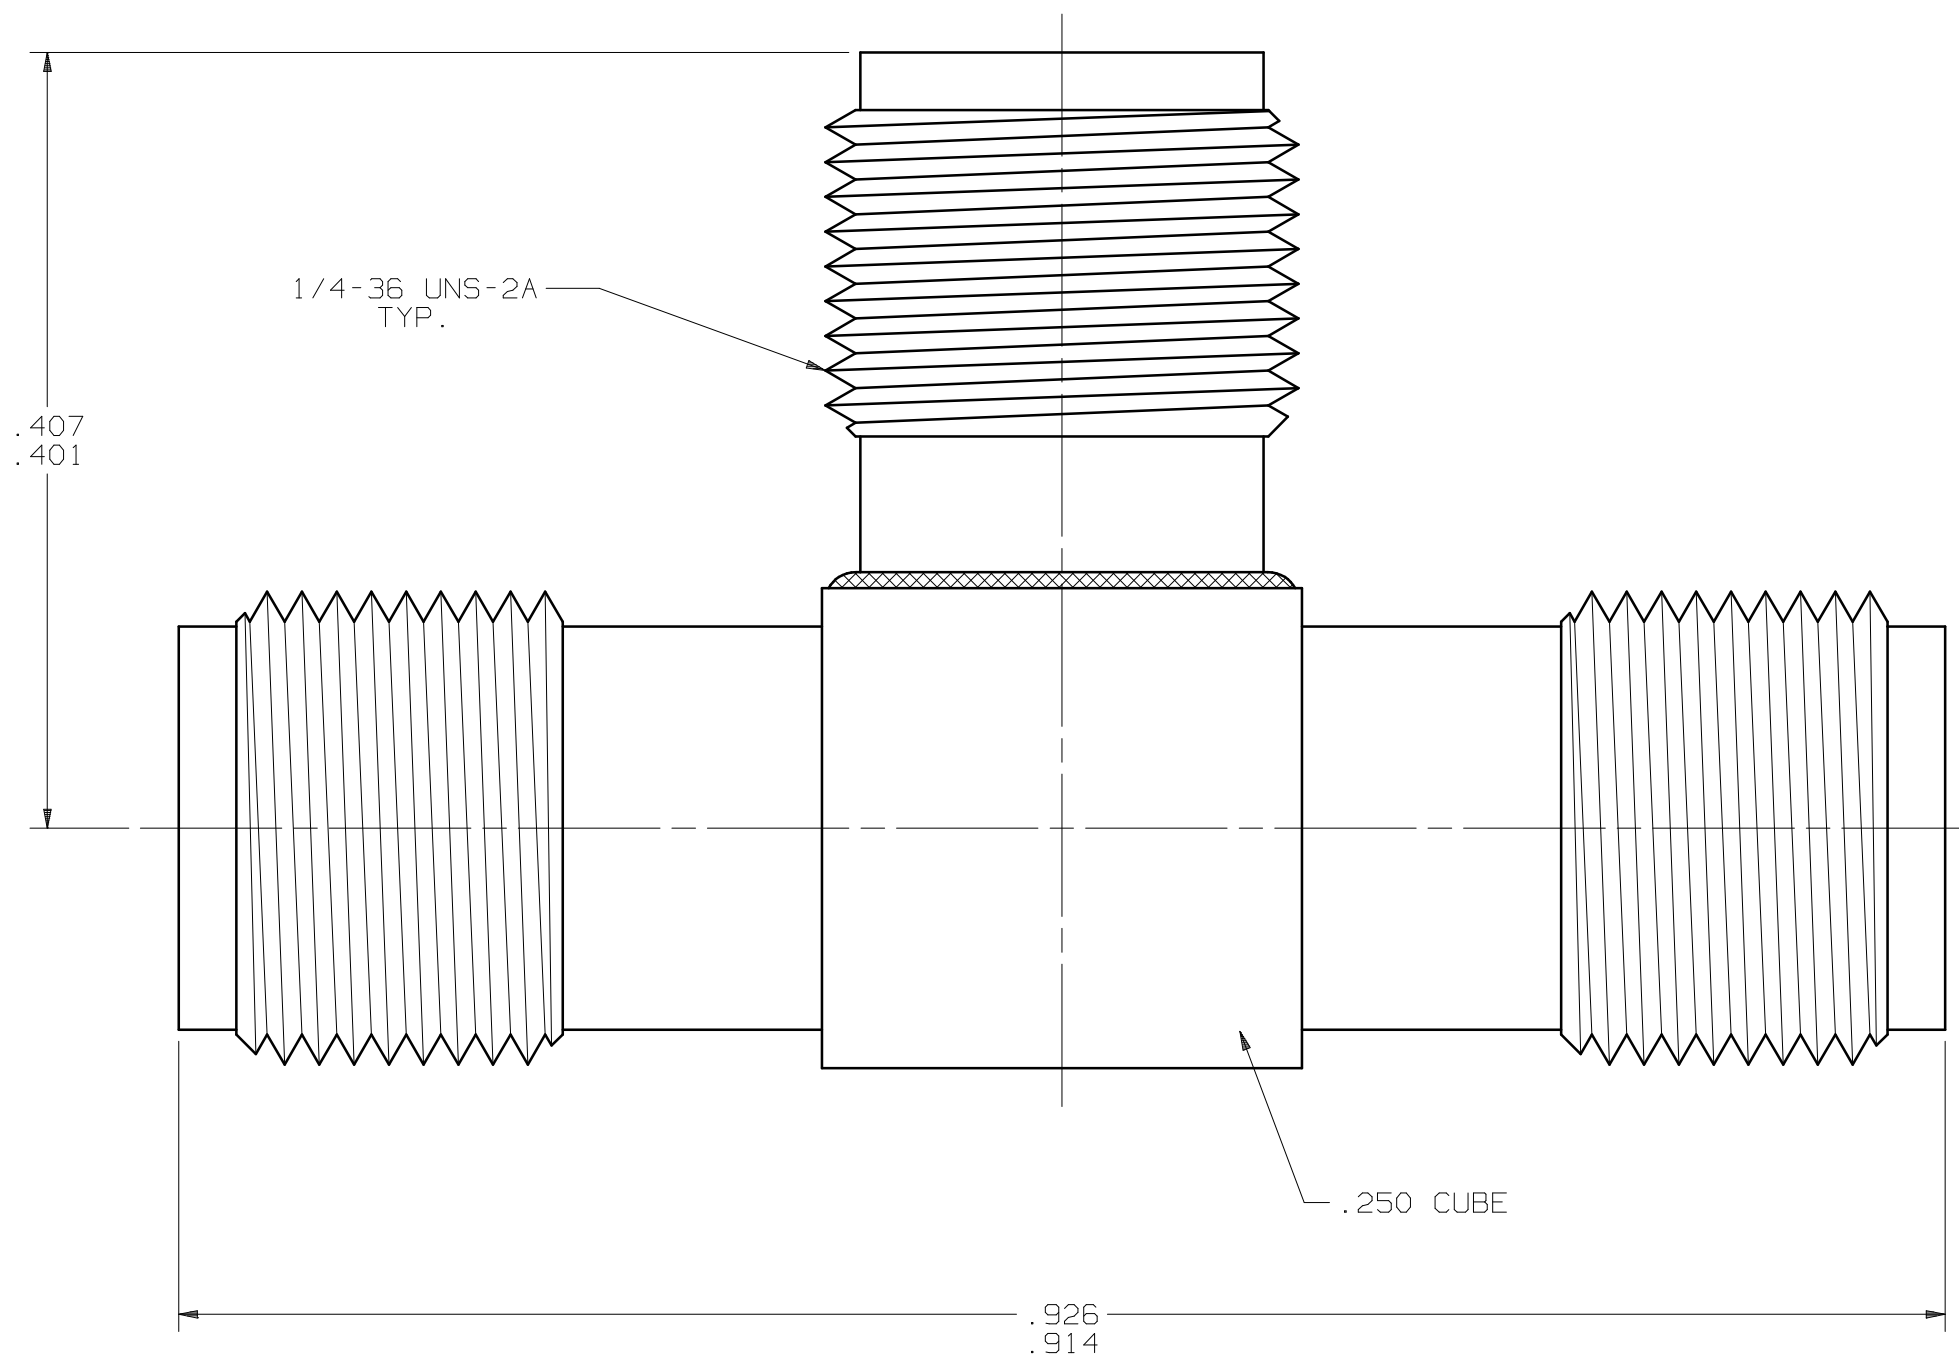

MATERIAL:

BODIES: STAINLESS STEEL PER AMS-5640,
UNS S30300 (TYPE I), COND A.

INSULATORS: TEFLON PER ASTM-D-1457 OR
ASTM-D-1710.

CONTACTS: BERYLLIUM COPPER PER ASTM-B196
COND. TD04, ALLOY UNS-C17300

PRESS CAP: STAINLESS STEEL PER ASTM-A-240
ALLOY UNS S30400, TYPE 304.

FINISH:

BODIES &
PRESS CAP: PASSIVATE PER QQ-P-35C, TYPE II

CONTACT: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 1 OVER NICKEL
PER QQ-N-290, CLASS 1

ELECTRICAL:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 12.4 GHz
D.W.V.: 1,000 VRMS
INSUL. RES.: 5,000 MEGOHMS

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED: 1) ALL DIMENSIONS ARE AFTER PLATING. 2) BREAK CORNERS & EDGES .005 R. MAX. 3) CHAM. 1st & LAST THDS. 4) SURFACE ROUGHNESS 63 J MIL-STD-10. 5) DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6) REMOVE ALL BURRS.	DIMENSIONS ARE IN INCHES			SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409 TITLE: SMA SERIES ADAPTER TEE (JACK/JACK/JACK) DWG. NO. M55339/30-30003
					TOLERANCES:			
					DECIMALS	FRACTIONAL	ANGULAR	
					.X ±.030		X° ±1°0'	
.XX ±.015	±1/64	X°X' ±15'						
.XXX ±.005								
	MATERIAL: PER BOM				□" AREA:			
	FINISH: PER BOM				N/A			
				DRAWN: VMJ 06/05/02	SIZE	CAGE NO.	SCALE	
				CHECKED: STW 06/05/02	B	95077	10X	
				APPROVED: STW 06/05/02				